



Performance



Accessibility



Best Practices




SEO



Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0-49 50-89 90-100

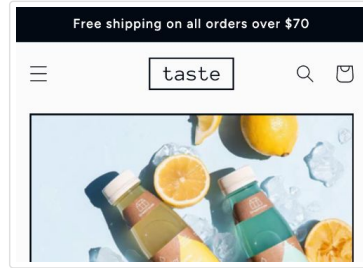

METRICS

[Expand view](#)

First Contentful Paint

2.2 s

▲ Largest Contentful Paint

4.7 s

Total Blocking Time

140 ms


Cumulative Layout Shift

0.056

Speed Index

2.6 s

[View Treemap](#)



Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

DIAGNOSTICS

▲ Largest Contentful Paint element — 4,730 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#) (LCP)

Element




Phase	% of LCP	Timing
TTFB	15%	730 ms
Load Delay	44%	2,080 ms
Load Time	26%	1,240 ms

Phase	% of LCP	Timing
Render Delay	14%	680 ms

▲ Largest Contentful Paint image was lazily loaded ^

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) FCP LCP

Element


img

▲ Eliminate render-blocking resources — Potential savings of 960 ms ^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) FCP LCP

URL	Transfer Size	Potential Savings
myshopify.com 1st Party	22.6 KiB	7,320 ms
...assets/component-image-with-text.css?v=9929569... (theme-taste-demo.myshopify.com)	2.1 KiB	600 ms
...assets/component-card.css?v=1274130... (theme-taste-demo.myshopify.com)	2.2 KiB	600 ms
...assets/component-price.css?v=1126738... (theme-taste-demo.myshopify.com)	1.4 KiB	600 ms
...assets/component-rating.css?v=2457308... (theme-taste-demo.myshopify.com)	1.3 KiB	600 ms
...assets/section-image-banner.css?v=1764875... (theme-taste-demo.myshopify.com)	2.1 KiB	600 ms
...assets/component-slider.css?v=1491291... (theme-taste-demo.myshopify.com)	2.0 KiB	600 ms
...assets/component-slideshow.css?v=7176802... (theme-taste-demo.myshopify.com)	1.8 KiB	600 ms
...assets/section-collection-list.css?v=2981173... (theme-taste-demo.myshopify.com)	1.3 KiB	600 ms
...assets/section-main-product.css?v=4802603... (theme-taste-demo.myshopify.com)	4.4 KiB	750 ms
...assets/section-featured-product.css?v=4287368... (theme-taste-demo.myshopify.com)	1.4 KiB	600 ms
...assets/component-accordion.css?v=1809642... (theme-taste-demo.myshopify.com)	1.3 KiB	600 ms
...assets/component-rte.css?v=6991943... (theme-taste-demo.myshopify.com)	1.4 KiB	600 ms

▲ Reduce unused JavaScript — Potential savings of 31 KiB ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP

URL	Transfer Size	Potential Savings
myshopify.com 1st Party	52.4 KiB	30.8 KiB
...latest/portable-wallets.en.js (theme-taste-demo.myshopify.com)	52.4 KiB	30.8 KiB

▲ Minimize main-thread work — 2.9 s ^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

Category	Time Spent
Other	1,300 ms
Script Evaluation	939 ms
Style & Layout	382 ms
Parse HTML & CSS	92 ms
Garbage Collection	68 ms
Script Parsing & Compilation	63 ms
Rendering	57 ms


Serve static assets with an efficient cache policy — 4 resources found

A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

URL	Cache TTL	Transfer Size
myshopify.com 1st Party		104 KiB
...latest/portable-wallets.en.js (theme-taste-demo.myshopify.com)	5m	53 KiB
...anonymous_pro/anonymouspro_n4.07ee957....woff2?h1=... (theme-taste-demo.myshopify.com)	30d 10h 30m	21 KiB
...anonymous_pro/anonymouspro_i4.6271571....woff2?h1=... (theme-taste-demo.myshopify.com)	30d 10h 30m	18 KiB
...figtree/figtree_n5.f19a9e5....woff2?h1=dGhIbWUtd...&hmac=42939a4... (theme-taste-demo.myshopify.com)	30d 10h 30m	13 KiB

Properly size images — Potential savings of 80 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#) FCP
LCP

URL	Resource Size	Potential Savings
myshopify.com 1st Party	155.4 KiB	79.6 KiB
 img	...files/Kale_1080x_52c6c5bc-d5b8-4e82-8a6c-b8e85a303088.jpg?v=... (theme-taste-demo.myshopify.com)	155.4 KiB 79.6 KiB



Avoid serving legacy JavaScript to modern browsers — Potential savings of 0 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/homodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) FCP LCP

URL	Potential Savings
myshopify.com 1st Party	0.1 KiB
...assets/shop_events_listener-61fa9e0...js (theme-taste-demo.myshopify.com)	0.1 KiB
<code>shop_events_listener...3515985a8cd626.js:1</code>	@babel/plugin-transform-classes

Avoid an excessive DOM size — 912 elements

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) TBT

Statistic	Element	Value
Total DOM Elements		912
Maximum DOM Depth		18
Maximum Child Elements		23
	div#shopify-section-header.shopify-section.section-header	

JavaScript execution time — 0.7 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

URL	Total CPU Time	Script Evaluation	Script Parse
myshopify.com 1st Party	1,621 ms	688 ms	46 ms
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	1,033 ms	152 ms	16 ms
...storefront/load_feature-1060834...js (theme-taste-demo.myshopify.com)	221 ms	213 ms	2 ms
...wpm/b70383a35w7726c023p4d88ec8dm493e98ecm.js (theme-taste-demo.myshopify.com)	203 ms	177 ms	16 ms
...s/trekkie.storefront.8b4c164...min.js (theme-taste-demo.myshopify.com)	164 ms	146 ms	12 ms
Unattributable	922 ms	14 ms	0 ms
Unattributable	922 ms	14 ms	0 ms

Avoid long main-thread tasks — 8 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks.](#) TBT

URL	Start Time	Duration
myshopify.com 1st Party		673 ms

URL	Start Time	Duration
...storefront/load_feature-1060834....js (theme-taste-demo.myshopify.com)	5,053 ms	185 ms
...wpm/b70383a35w7726c023p4d88ec8dm493e98ecm.js (theme-taste-demo.myshopify.com)	5,338 ms	113 ms
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	1,053 ms	108 ms
...s/trekkie.storefront.8b4c164....min.js (theme-taste-demo.myshopify.com)	4,300 ms	87 ms
...s/trekkie.storefront.8b4c164....min.js (theme-taste-demo.myshopify.com)	4,387 ms	67 ms
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	1,285 ms	60 ms
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	1,232 ms	53 ms
Unattributable		61 ms
Unattributable	1,404 ms	61 ms

○ Avoid large layout shifts — 2 layout shifts found

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) (CLS)

Element



div.image-with-text.image-with-text--no-overlap.page-width.isolate.collapse-borders.collapse-corners.section-template--22715887222806__16451239582ff4a6

...assets/component-rte.css?v=6991943... (theme-taste-demo.myshopify.com)

...assets/component-accordion.css?v=1809642... (theme-taste-demo.myshopify.com)

...assets/section-featured-product.css?v=4287368... (theme-taste-demo.myshopify.com)

...assets/section-main-product.css?v=4802603... (theme-taste-demo.myshopify.com)

...assets/section-collection-list.css?v=2981173... (theme-taste-demo.myshopify.com)

...assets/component-image-with-text.css?v=9929569... (theme-taste-demo.myshopify.com)

Element

...assets/component-slideshow.css?v=7176802... (theme-taste-demo.myshopify.com)

...assets/component-price.css?v=1126738... (theme-taste-demo.myshopify.com)


...assets/component-slider.css?v=1491291... (theme-taste-demo.myshopify.com)

...assets/section-image-banner.css?v=1764875... (theme-taste-demo.myshopify.com)

...assets/component-rating.css?v=2457308... (theme-taste-demo.myshopify.com)

...assets/component-card.css?v=1274130... (theme-taste-demo.myshopify.com)

...assets/base.css?v=1449970... (theme-taste-demo.myshopify.com)



div.image-with-text__text-item > div#ImageWithText--template--22715887222806__16451289582ff4a6fd > a.button > ::after
<::after>

...assets/section-footer.css?v=8377758... (theme-taste-demo.myshopify.com)

...assets/section-multicolumn.css?v=1052165... (theme-taste-demo.myshopify.com)

...assets/component-loading-overlay.css?v=1673104... (theme-taste-demo.myshopify.com)

Element

...assets/component-rte.css?v=6991943... (theme-taste-demo.myshopify.com)

...assets/component-accordion.css?v=1809642... (theme-taste-demo.myshopify.com)

...assets/section-featured-product.css?v=4287368... (theme-taste-demo.myshopify.com)

...assets/section-main-product.css?v=4802603... (theme-taste-demo.myshopify.com)

...assets/section-collection-list.css?v=2981173... (theme-taste-demo.myshopify.com)

...assets/component-image-with-text.css?v=9929569... (theme-taste-demo.myshopify.com)

...assets/component-slideshow.css?v=7176802... (theme-taste-demo.myshopify.com)

...assets/component-price.css?v=1126738... (theme-taste-demo.myshopify.com)

...assets/component-slider.css?v=1491291... (theme-taste-demo.myshopify.com)

...assets/section-image-banner.css?v=1764875... (theme-taste-demo.myshopify.com)

...assets/component-rating.css?v=2457308... (theme-taste-demo.myshopify.com)

...assets/component-card.css?v=1274130... (theme-taste-demo.myshopify.com)

Element

...assets/base.css?v=1449970... (theme-taste-demo.myshopify.com)

○ User Timing marks and measures — 17 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

Name	Type	Start Time	Duration
wpm:completed	Measure	578.08 ms	1,055.25 ms
buttonDisplay-dc:1-duration	Measure	884.06 ms	7.93 ms
loadSDK-BuyItNow:1-duration	Measure	885.98 ms	0.54 ms
wpm:pixel:register:shopify-app-pixel:app	Measure	1,025.12 ms	475.52 ms
wpm:pixel:register:shopify-custom-pixel:custom	Measure	1,025.93 ms	607.01 ms
shopify.content_for_header.start	Mark	342.77 ms	
shopify.content_for_header.end	Mark	347.66 ms	
wpm:start	Mark	578.08 ms	
buttonDisplay-dc:1-start	Mark	884.06 ms	
loadSDK-BuyItNow:1-start	Mark	885.98 ms	
loadSDK-BuyItNow:1-end	Mark	886.52 ms	
buttonDisplay-dc:1-end	Mark	891.99 ms	
wpm:pixel:register:started:shopify-app-pixel:app	Mark	1,025.12 ms	
wpm:pixel:register:started:shopify-custom-pixel:custom	Mark	1,025.93 ms	
wpm:pixel:register:completed:shopify-app-pixel:app	Mark	1,500.64 ms	
wpm:pixel:register:completed:shopify-custom-pixel:custom	Mark	1,632.94 ms	
wpm:pixels:resolved	Mark	1,633.34 ms	

○ Avoid non-composited animations — 1 animated element found

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) (CLS)

Element	Name
circle.path	
Unsupported CSS Property: stroke-dashoffset	dash

○ Initial server response time was short — Root document took 20 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the](#)

URL	Time Spent
myshopify.com 1st Party	20 ms
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	20 ms

○ Avoids enormous network payloads — Total size was 1,197 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)

Show 3rd-party resources (4)

URL	Transfer Size
Shopify Hosting	460.6 KiB
...c1.en/app.DILEDILX.js (cdn.shopify.com)	361.2 KiB
...c1.en/Localizat...G0r0BbXA.js (cdn.shopify.com)	39.6 KiB
...c1.en/VaultedContact.D6afxXPX.js (cdn.shopify.com)	34.1 KiB
...c1.en/index.CT_oPLpo.js (cdn.shopify.com)	25.7 KiB
myshopify.com 1st Party	335.5 KiB
...files/Kale_1080x_52c6c5bc-d5b8-4e82-8a6c-b8e85a303088.jpg?v=... (theme-taste-demo.myshopify.com)	156.4 KiB
...latest/portable-wallets.en.js (theme-taste-demo.myshopify.com)	53.3 KiB
...wpm/b70383a35w7726c023p4d88ec8dm493e98ecm.js (theme-taste-demo.myshopify.com)	41.9 KiB
...files/Screensho....49.34_PM_1070x_1070x_e5f771b3-b41d-4f09....png?... (theme-taste-demo.myshopify.com)	31.3 KiB
/?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)	27.9 KiB
...s/trekkie.storefront.8b4c164....min.js (theme-taste-demo.myshopify.com)	24.7 KiB

○ Avoid chaining critical requests — 18 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#)

Maximum critical path latency: **1,096.104 ms**

Initial Navigation

- /?_bt=BAh7BkkiC... (theme-taste-demo.myshopify.com)
- ...assets/base.css?v=1449970... (theme-taste-demo.myshopify.com) - **175.715 ms, 8.84 KiB**
- ...assets/component-image-with-text.css?v=9929569... (theme-taste-demo.myshopify.com) - **203.341 ms, 2.12 KiB**
- ...assets/component-card.css?v=1274130... (theme-taste-demo.myshopify.com) - **179.92 ms, 2.20 KiB**
- ...assets/component-price.css?v=1126738... (theme-taste-demo.myshopify.com) - **186.748 ms, 1.42 KiB**
- ...assets/component-rating.css?v=2457308... (theme-taste-demo.myshopify.com) - **171.753 ms, 1.32 KiB**
- ...assets/section-image-banner.css?v=1764875... (theme-taste-demo.myshopify.com) - **170.765 ms, 2.05 KiB**
- ...assets/component-slider.css?v=1491291... (theme-taste-demo.myshopify.com) - **166.06 ms, 1.98 KiB**
- ...assets/component-slideshow.css?v=7176802... (theme-taste-demo.myshopify.com) - **167.159 ms, 1.77 KiB**
- ...assets/section-collection-list.css?v=2981173... (theme-taste-demo.myshopify.com) - **175.679 ms, 1.26 KiB**
- ...assets/section-main-product.css?v=4802603... (theme-taste-demo.myshopify.com) - **175.575 ms, 4.37 KiB**
- ...assets/section-featured-product.css?v=4287368... (theme-taste-demo.myshopify.com) - **174.812 ms, 1.37 KiB**
- ...assets/component-accordion.css?v=1809642... (theme-taste-demo.myshopify.com) - **175.278 ms, 1.34 KiB**
- ...assets/component-rte.css?v=6991943... (theme-taste-demo.myshopify.com) - **183.725 ms, 1.36 KiB**

...assets/component-loading-overlay.css?v=1673104... (theme-taste-demo.myshopify.com) - 236.594 ms, 1.39 KiB

...assets/section-footer.css?v=8377758... (theme-taste-demo.myshopify.com) - 224.056 ms, 2.52 KiB

...anonymous_pro/anonymouspro_i4.6271571....woff2?h1=... (theme-taste-demo.myshopify.com) - 386.686 ms, 17.70 KiB

...latest/portable-wallets.en.js (theme-taste-demo.myshopify.com) - 311.383 ms, 53.25 KiB

○ Minimize third-party usage — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Shopify Hosting	604 KiB	0 ms
...c1.en/app.DILEDILX.js (cdn.shopify.com)	361 KiB	0 ms
...c1.en/Localizat....G0r0BbXA.js (cdn.shopify.com)	40 KiB	0 ms
...c1.en/VaultedContact.D6afxXPX.js (cdn.shopify.com)	34 KiB	0 ms
...c1.en/index.CT_oPLpo.js (cdn.shopify.com)	26 KiB	0 ms
...assets/app.BYPfQJHS.css (cdn.shopify.com)	23 KiB	0 ms
...c1.en/DeliveryM....C1d0AHci.js (cdn.shopify.com)	22 KiB	0 ms
...c1.en/polyfills.CqZeYl46.js (cdn.shopify.com)	15 KiB	0 ms
...c1.en/useGetBuy....CEhb61hJ.js (cdn.shopify.com)	8 KiB	0 ms
...c1.en/GooglePayPCIButton.Cwb7ao_I.js (cdn.shopify.com)	7 KiB	0 ms
...c1.en/PayButtonSection.Cw13ZUj-.js (cdn.shopify.com)	5 KiB	0 ms
...c1.en/hooks.DdTMWgl-.js (cdn.shopify.com)	4 KiB	0 ms
...c1.en/useAmazonContact.D9M8jQcm.js (cdn.shopify.com)	4 KiB	0 ms
...c1.en/DutyOptions.CrxK4jKQ.js (cdn.shopify.com)	4 KiB	0 ms
...c1.en/AmazonPayPCIButton.DpvDB5F2.js (cdn.shopify.com)	4 KiB	0 ms
...c1.en/CheckoutAsGuest.DT_SAa0n.js (cdn.shopify.com)	3 KiB	0 ms
...c1.en/Subscript....BPsJ0YqX.js (cdn.shopify.com)	3 KiB	0 ms
...assets/DeliveryM....Gt99Mw9F.css (cdn.shopify.com)	3 KiB	0 ms
...c1.en/useInstal....4Y9KgziE.js (cdn.shopify.com)	3 KiB	0 ms
...c1.en/PickupPoi....SYHs4BoB.js (cdn.shopify.com)	3 KiB	0 ms
...c1.en/Rollup.CAi8YqKP.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/index.BI3iZrr1.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/ShopPayLogo.Bl5maggAt.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/Section.-X0wFzG_.js (cdn.shopify.com)	2 KiB	0 ms
...assets/Localizat....BQ3829nT.css (cdn.shopify.com)	2 KiB	0 ms
...c1.en/StockProb....S6DaeK8J.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/useShowShopPayOptin.DNYssEdq.js (cdn.shopify.com)	2 KiB	0 ms
...assets/VaultedContact.BsDM6oHQ.css (cdn.shopify.com)	2 KiB	0 ms
...c1.en/useRefEffect.blPV7l4x.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/useUnauth....BGstL6cq.js (cdn.shopify.com)	2 KiB	0 ms
...c1.en/RageClickCapture.BGdoZx33.js (cdn.shopify.com)	2 KiB	0 ms
...assets/useGetBuy....DVQdwG9J.css (cdn.shopify.com)	1 KiB	0 ms
...		
c1.en/useShopPayRequiresVerification.DbbLwuDi.js (cdn.shopify.com)	1 KiB	0 ms
)		
...assets/Rollup.mj3hAev9.css (cdn.shopify.com)	1 KiB	0 ms
...assets/CheckoutAsGuest.CUoq2pCx.css (cdn.shopify.com)	1 KiB	0 ms
...assets/useAmazonContact.D-Ox6Dnf.css (cdn.shopify.com)	1 KiB	0 ms
...assets/PayButtonSection.DF7trkKf.css (cdn.shopify.com)	1 KiB	0 ms
...assets/Section.BzDw6wmZ.css (cdn.shopify.com)	1 KiB	0 ms
...assets/RageClickCapture.DnkQ4tsk.css (cdn.shopify.com)	1 KiB	0 ms
...assets/Subscript....Bqs0s4oM.css (cdn.shopify.com)	1 KiB	0 ms
...assets/StockProblemsLineltemList.CxdlQKjw.css (cdn.shopify.com)	1 KiB	0 ms

Third-Party	Transfer Size	Main-Thread Blocking Time
...assets/ShopPayLogo.D_HPU8Dh.css (cdn.shopify.com)	1 KiB	0 ms
...assets/DutyOptions.Bd1Z60K2.css (cdn.shopify.com)	1 KiB	0 ms
...assets/PickupPoi....C0wRU6wV.css (cdn.shopify.com)	1 KiB	0 ms
/v1/produce (monorail-edge.shopifysvc.com)	0 KiB	0 ms
/v1/metrics (otlp-http-production.shopifysvc.com)	0 KiB	0 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (20)

Hide

Defer offscreen images	^
Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. (FCP) (LCP)	
Minify CSS	^
Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. (FCP) (LCP)	
Minify JavaScript	^
Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. (FCP) (LCP)	
Reduce unused CSS	^
Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. Learn how to reduce unused CSS. (FCP) (LCP)	
Efficiently encode images	^
Optimized images load faster and consume less cellular data. Learn how to efficiently encode images. (FCP) (LCP)	
Serve images in next-gen formats	^
Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. Learn more about modern image formats. (FCP) (LCP)	
Enable text compression	^
Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. Learn more about text compression. (FCP) (LCP)	
Preconnect to required origins	^
<p>Warnings:</p> <ul style="list-style-type: none"> A <code><link rel=preconnect></code> was found for "https://fonts.shopifycdn.com" but was not used by the browser. Only use <code>preconnect</code> for important origins that the page will certainly request. More than 2 <code><link rel=preconnect></code> connections were found. These should be used sparingly and only to the most important origins. 	
Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. Learn how to preconnect to required origins. (LCP) (FCP)	
Avoid multiple page redirects	^
Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. (LCP) (FCP)	
Use HTTP/2	^
HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. Learn more about HTTP/2. (LCP) (FCP)	

Use video formats for animated content	^
Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats FCP LCP	
Remove duplicate modules in JavaScript bundles	^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP	
Preload Largest Contentful Paint image	^
If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. Learn more about preloading LCP elements . LCP	
All text remains visible during webfont loads	^
Leverage the <code>font-display</code> CSS feature to ensure text is user-visible while webfonts are loading. Learn more about font-display .	
<input type="radio"/> Lazy load third-party resources with facades	^
Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. Learn how to defer third-parties with a facade . TBT	
Uses passive listeners to improve scrolling performance	^
Consider marking your touch and wheel event listeners as <code>passive</code> to improve your page's scroll performance. Learn more about adopting passive event listeners .	
Avoids <code>document.write()</code>	^
For users on slow connections, external scripts dynamically injected via <code>document.write()</code> can delay page load by tens of seconds. Learn how to avoid document.write() .	
Image elements have explicit <code>width</code> and <code>height</code>	^
Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions CLS	
Has a <code><meta name="viewport"></code> tag with <code>width</code> or <code>initial-scale</code>	^
A <code><meta name="viewport"></code> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input . Learn more about using the viewport meta tag .	
Page didn't prevent back/forward cache restoration	^
Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. Learn more about the bfcache	



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

NAMES AND LABELS

▲ Image elements have <code>[alt]</code> attributes that are redundant text.	^
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn	

[more about the alt attribute.](#)

Failing Elements	
	img.motion-reduce
	img.motion-reduce
	img.motion-reduce

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

<input type="radio"/> Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable.	
<input type="radio"/> Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.	
<input type="radio"/> The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering.	
<input type="radio"/> Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering.	
<input type="radio"/> User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps.	
<input type="radio"/> The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
<input type="radio"/> HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.	
<input type="radio"/> Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
<input type="radio"/> Custom controls have associated labels	^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.
<input type="radio"/> Custom controls have ARIA roles ^
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

PASSED AUDITS (26)

Hide

[aria-*] attributes match their roles ^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.
[aria-hidden="true"] is not present on the document <body> ^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.
[role]s have all required [aria-*] attributes ^
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.
Elements with an ARIA [role] that require children to contain a specific [role] have all required children. ^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements.
[aria-*] attributes have valid values ^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.
[aria-*] attributes are valid and not misspelled ^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.
Buttons have an accessible name ^
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible.
Image elements have [alt] attributes ^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.
[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5. ^
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.
ARIA attributes are used as specified for the element's role ^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.
[aria-hidden="true"] elements do not contain focusable descendents ^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.

Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
[role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.	
Background and foreground colors have a sufficient contrast ratio	^
Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.	
Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
<html> element has a [lang] attribute	^
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	
<html> element has a valid value for its [lang] attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
Form elements have associated labels	^
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels.	
Links have a discernible name	^
Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.	
Lists contain only elements and script supporting elements (<script> and <template>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
List items () are contained within , or <menu> parent elements	^
Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure.	
No element has a [tabindex] value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the tabindex attribute.	
Touch targets have sufficient size and spacing.	^
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.	
Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.	
Uses ARIA roles only on compatible elements	^

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#)

Deprecated ARIA roles were not used

Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#)

NOT APPLICABLE (30)

Hide

[\[accesskey\]](#) values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#)

[button](#), [link](#), and [menuitem](#) elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#)

Elements with `role="dialog"` or `role="alertdialog"` have accessible names.

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#)

ARIA input fields have accessible names

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#)

ARIA [meter](#) elements have accessible names

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#)

ARIA [progressbar](#) elements have accessible names

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#)

[\[role\]](#)s are contained by their required parent element

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#)

Elements with the `role=text` attribute do not have focusable descendents.

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the role=text attribute.](#)

ARIA toggle fields have accessible names

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#)

ARIA [tooltip](#) elements have accessible names

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#)

ARIA [treeitem](#) elements have accessible names

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling treeitem elements.](#)

The page contains a heading, skip link, or landmark region

<p>Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks.</p>
<p><input type="radio"/> <code><dl></code>'s contain only properly-ordered <code><dt></code> and <code><dd></code> groups, <code><script></code>, <code><template></code> or <code><div></code> elements. ^</p>
<p>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.</p>
<p><input type="radio"/> Definition list items are wrapped in <code><dl></code> elements ^</p>
<p>Definition list items (<code><dt></code> and <code><dd></code>) must be wrapped in a parent <code><dl></code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</p>
<p><input type="radio"/> ARIA IDs are unique ^</p>
<p>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs.</p>
<p><input type="radio"/> No form fields have multiple labels ^</p>
<p>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.</p>
<p><input type="radio"/> <code><frame></code> or <code><iframe></code> elements have a title ^</p>
<p>Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.</p>
<p><input type="radio"/> <code><html></code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute. ^</p>
<p>If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.</p>
<p><input type="radio"/> Input buttons have discernible text. ^</p>
<p>Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons.</p>
<p><input type="radio"/> <code><input type="image"></code> elements have <code>[alt]</code> text ^</p>
<p>When an image is being used as an <code><input></code> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.</p>
<p><input type="radio"/> Links are distinguishable without relying on color. ^</p>
<p>Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.</p>
<p><input type="radio"/> The document does not use <code><meta http-equiv="refresh"></code> ^</p>
<p>Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag.</p>
<p><input type="radio"/> <code><object></code> elements have alternate text ^</p>
<p>Screen readers cannot translate non-text content. Adding alternate text to <code><object></code> elements helps screen readers convey meaning to users. Learn more about alt text for object elements.</p>
<p><input type="radio"/> Select elements have associated label elements. ^</p>
<p>Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the select element.</p>
<p><input type="radio"/> Skip links are focusable. ^</p>
<p>Including a skip link can help users skip to the main content to save time. Learn more about skip links.</p>

- Tables have different content in the summary attribute and `<caption>`.

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#)
- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)
- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)
- `[lang]` attributes have a valid value

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)
- `<video>` elements contain a `<track>` element with `[kind="captions"]`

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)



Best Practices

TRUST AND SAFETY

- Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
<code>`script-src`</code> directive is missing. This can allow the execution of unsafe scripts.	<code>script-src</code>	High
Missing <code>`object-src`</code> allows the injection of plugins that execute unsafe scripts. Consider setting <code>`object-src`</code> to <code>`none`</code> if you can.	<code>object-src</code>	High

GENERAL

- Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
Shopify	
core-js	core-js-global@3.37.0

PASSED AUDITS (15)

Hide

- Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS](#).

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs](#).

Avoids third-party cookies

Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. [Learn more about third-party cookies](#).

Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields](#).

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission](#).

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications](#).

Displays images with correct aspect ratio

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio](#).

Serves images with appropriate resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale`

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).

Document uses legible font sizes — 98.89% legible text

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes](#).

Source	Selector	% of Page Text	Font Size
Unattributable			
User Agent Stylesheet	small	1.11%	8.75px
Legible text		98.89%	≥ 12px
myshopify.com 1st Party			
<code>base.css:1</code>	.caption	0.00%	10.5px

Page has the HTML doctype

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration](#).

Properly defines charset

A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

No browser errors logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

No issues in the **Issues** panel in Chrome Devtools ^

Issues logged to the **Issues** panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

URL	Map URL
myshopify.com 1st Party	
...v0.1/consent-tracking-api.js (theme-taste-demo.myshopify.com)	...v0.1/consent-tracking-api.js.map (theme-taste-demo.myshopify.com)
...compiled_assets/scripts.js?251 (theme-taste-demo.myshopify.com)	...compiled_assets/scripts.js.map?251= (theme-taste-demo.myshopify.com)
...assets/product-form.js?v=1429052... (theme-taste-demo.myshopify.com)	...assets/product-form.js.map?v=1429052... (theme-taste-demo.myshopify.com)
...assets/predictive-search.js?v=3127871... (theme-taste-demo.myshopify.com)	...assets/predictive-search.js.map?v=3127871... (theme-taste-demo.myshopify.com)
...assets/media-gallery.js?v=1529025... (theme-taste-demo.myshopify.com)	...assets/media-gallery.js.map?v=1529025... (theme-taste-demo.myshopify.com)
...assets/global.js?v=1351164... (theme-taste-demo.myshopify.com)	...assets/global.js.map?v=1351164... (theme-taste-demo.myshopify.com)
...assets/details-modal.js?v=4511761... (theme-taste-demo.myshopify.com)	...assets/details-modal.js.map?v=4511761... (theme-taste-demo.myshopify.com)
...assets/details-disclosure.js?v=9382762... (theme-taste-demo.myshopify.com)	...assets/details-disclosure.js.map?v=9382762... (theme-taste-demo.myshopify.com)
...assets/cart-notification.js?v=1104649... (theme-taste-demo.myshopify.com)	...assets/cart-notification.js.map?v=1104649... (theme-taste-demo.myshopify.com)

NOT APPLICABLE (1) Hide

Redirects HTTP traffic to HTTPS ^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does

CONTENT BEST PRACTICES

▲ Document does not have a meta description ^

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description](#).

▲ Links do not have descriptive text — 1 link found ^

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible](#).

Link destination	Link Text
myshopify.com 1st Party	
/pages/about-us (theme-taste-demo.myshopify.com)	Learn more

Format your HTML in a way that enables crawlers to better understand your app's content.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

○ Structured data is valid ^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data](#).

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

Page isn't blocked from indexing ^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives](#).

Document has a <title> element ^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles](#).

Page has successful HTTP status code ^

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes](#).

Links are crawlable ^

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

robots.txt is valid ^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt](#).

Image elements have [alt] attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute](#).

Document has a valid hreflang ^

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang](#).

Document has a valid [rel=canonical](#)



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

■ Captured at Dec 21, 2024,
11:59 PM GMT+4

■ Emulated Moto G Power with
Lighthouse 12.2.1

■ Single page session

■ Initial page load

■ Slow 4G throttling

■ Using Chromium 131.0.0.0
with devtools

Generated by **Lighthouse** 12.2.1 | [File an issue](#)